

TECHNICAL DATA SHEET

Issue date: 02-2023

Page 1 from 3



Product Name: **SK BIT 105 PV ROOT PROTECTION**
Torch-Applied Bituminous Anti-Root Membrane

Product Code: TN722513 (Green)
TN722514 (Anthracite)


Roll Dimensions: 5 x 1.00 m

Weight: 6.6 kg/m²

Product description: SK BIT 105 PV ROOT PROTECTION is a torch-applied, bituminous membrane which is saturated and coated with high quality SBS (Styrene-Butadiene-Styrene) modified bitumen. It has a 250g/m² polyester fleece reinforcement and incorporates special additives which provides reliable protection from root growth. The root inhibiting additives used in this product have successfully passed 4 year tests in accordance with the FLL standards at the Botanic Institute Hamburg. Test certificates are available on request. SK BIT 105 PV ROOT PROTECTION has also been fully fire tested as part of a designated system in accordance with EN 13501-5 and DD CEN/TS 1187:2012, Broof Test 4.

Product use: SK BIT 105 PV ROOT PROTECTION provides exceptional waterproofing protection and is designed for use as part of a TN International approved extensive or intensive green roof specification

Properties	Test Method	Unit	Declared Performance
Length	DIN EN 1848-1	m	≥ 5.00
Width	DIN EN 1848-1	m	≥ 1.00
Straightness	DIN EN 1848-1	mm/10 m	≤ 20
Mass per unit area	DIN EN 1849-1	kg/m ²	6.6 (± 5%)
Thickness	DIN EN 1849-1	mm	≥ 5.20
Water tightness	DIN EN 1928 Method B	-	passed
Tensile properties: maximum tensile force	DIN EN 12311-1	N	1200 / 1000 (± 10%)
Tensile properties: elongation	DIN EN 12311-1	%	40/45 (± 5 abs)
Flexibility at low temperatures	DIN EN 1109	°C	≤ - 25
Flow resistance at elevated temperatures	DIN EN 12311-1	°C	≥ +115
External fire performance	Fire tested as part of a system in accordance with EN 13501-5 and DD CEN/TS 1187:2012, Broof Test 4 as certified by Warringtonfire*		



TECHNICAL DATA SHEET

Issue date: 02-2023

Page 2 from 3



Properties	Test Method	Unit	Declared Performance
Reaction to fire	DIN EN 11925-2	-	Class E according to DIN EN 13501-1

*As outlined in Warringtonfire Classification Report Nos. 19901D & 19901H

Features & benefits:

- High performance waterproofing membrane
- Torch-on application
- Resists the growth of roots from plants, shrubs and trees
- Rapid, simple installation
- SBS modified bitumen
- Tested as part of a system to achieve Broof Test 4 fire classification as certified by Warringtonfire




warringtonfire

Application Overview:

SK BIT 105 PV ROOT PROTECTION should be installed in accordance with manufacturer recommendations and all relevant national standards and codes of practice, including BS 8217: 2005 – the code of practice for reinforced bitumen membranes for roofing.

Roofing contractors should also be fully conversant with the guidelines set out in the National Federation of Roofing Contractors (NFRC) 'Safe2Torch' campaign. All operatives using torch guns or hot air guns during installation should be competent, conversant and capable of using such items in a safe and responsible manner. Care must also be taken when using torches and hot air guns in close proximity to combustible materials, decorative coatings and heat sensitive materials.

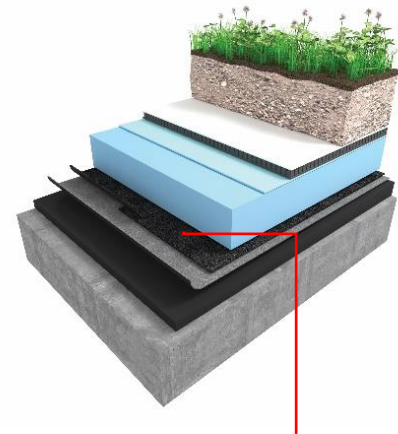


SK BIT 105 PV ROOT

When setting out the field area, rolls should always be laid in the same direction. Side lap width should be at least 8cm with end laps of at least 10 cm.

The SK BIT 105 PV ROOT PROTECTION membrane must be fully bonded to the prepared substrate by using the torch-on application method, ensuring that a constant flow of bitumen is maintained across the whole width of the roll and that a continuous bead of bitumen (5-15 mm) is exuded from all side and end laps to demonstrate that a good seal has been achieved. The lower surface has a thermofusible film which rapidly melts during the torching operation. When addressing an angle where the membrane will change from a horizontal to a vertical configuration, press the product firmly into place and ensure that a full bond is achieved throughout the detail

Chemical Resistance:

POLY-ELAST RAPID O is water-resistant and is resistant to watery solutions of salt, diluted non-oxidising acids SK BIT 105 PV ROOT PROTECTION is water-resistant and is resistant to watery solutions of salt, diluted nonoxidising acids and bases. Aliphatic and aromatic hydrocarbons, as well as chlorine hydrocarbons, oils and greases may loosen the product and should therefore be avoided.



TECHNICAL DATA SHEET

Issue date: 02-2023

Page 3 from 3



Storage:

Store in a cool, dry place and protect from direct sunlight

Health & Safety:

Health and Safety should be observed at all times in accordance with HSE and industry guidance. Specific Risk Assessments and Method Statements should be produced by contractors where necessary to ensure Working at Heights, Fire Safety and Manual Handling rules are compliant with current law and regulations. Health and safety data sheets are available for all materials on request from Technical Service Department.

Quality Assurance:

SK BIT 105 PV ROOT PROTECTION is manufactured following ISO 9001: 2008 Quality Management System and Environmental Management System approved to ISO 14001: 2004.